


DIY MEASURING GUIDELINES

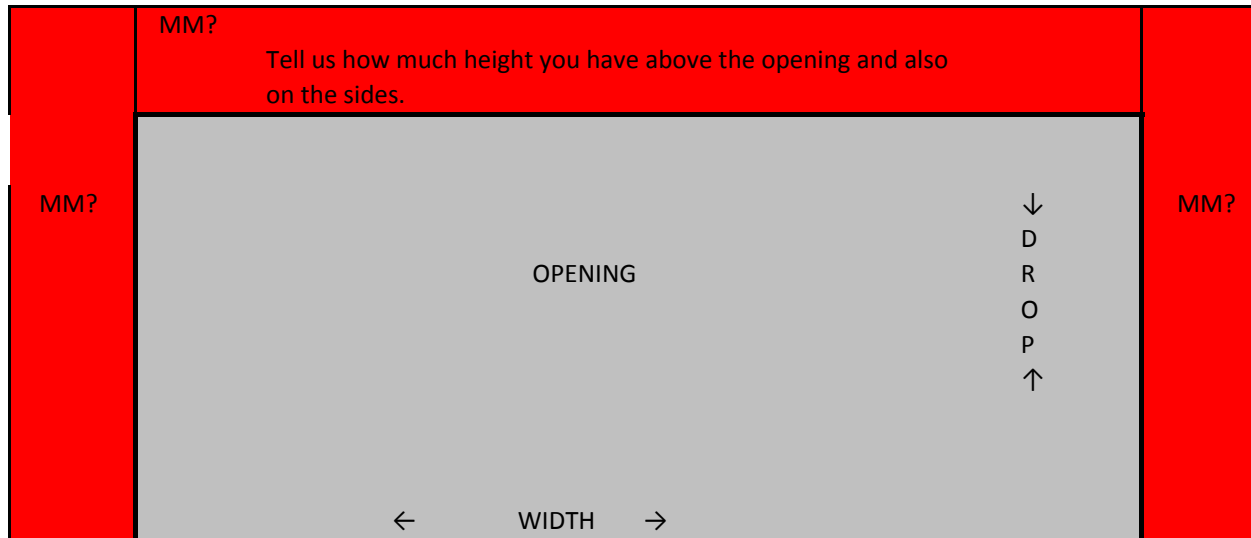

POINTS TO CONSIDER WHEN MEASURING DIY OUTDOOR BLINDS

- * BLINDS COME STANDARD WITH ROPE PULLEYS, TOP COVERS (+-300MM), CLEETS AND RAINFLAPS (+- 150MM).
- * DECIDE WHERE THE BLINDS ARE GOING TO BE FITTED- ON THE INSIDE, OUTSIDE OR UNDER THE LINTEL.
- * IF FITTING UNDER THE LINTEL, SIZES NEED TO BE EXACT. THERE IS NO ROOM FOR ERROR.
- * WE REQUIRE THE EXACT DROP/HEIGHT (H) AND THEN THE WIDTH (W) GOING ACROSS OF EACH OPENING. USE MM.
- * IMPORTANT: THE SIZE YOU ORDER IS THE SIZE YOU GET.
- * CONSIDER ANY OBSTRUCTIONS SUCH AS LIGHT FITTINGS, BURGLAR BARS ETC.
- * A BLIND MEASURING MORE THAN 3M ACROSS, CAN BE SPLIT DOWN THE MIDDLE WITH A ZIP.
- * SEND US A DIAGRAM/IMAGE INDICATING YOUR MEASUREMENTS COMMENCING WITH BLIND NO.1.
- * SPECIFY ON EACH BLIND WHAT YOU WANT SUCH AS: MATERIAL OPTIONS, ZIPS, VELCRO, WINDOWS, ZIP DOORS (SPECIFY MIDDLE, RIGHT OR LEFT SIDE), MOSQUITO MESH, CURTAINS, DOG FLAP (SMALL OR LARGE)
- * SUPPLIED TO YOU COMPLETE WITH METAL, NUTS & BOLTS. PLEASE COLLECT WHEN COMPLETE.

TERMS AND CONDITIONS APPLY